



N-BM30W Pro

Precise and Secure



Finger



RFID



Inbuilt Battery



WiFi



LAN



USB



Access Control

Time Attendance and Access Control

Storage Capacity

Finger Capacity	2000
Card Capacity	2000
Max User	2000
Password	2000
Log Capacity	1,50,000

Features

High-Speed and Accurate Fingerprint Identification

Fingerprint, Card, Password authentication


output relay for door open.

Good adaptation for dry, moist and rough fingerprints.

Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive software development kit(SDK) is available for development and integration.

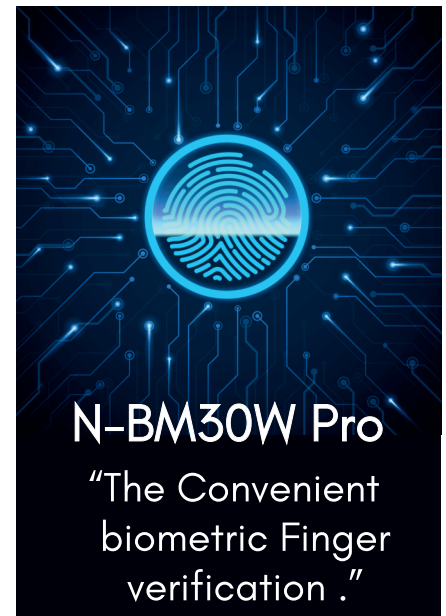

N-BM30W Pro

"The Convenient biometric Finger verification ."

N-BM30W Pro

Communication Interface

Communication	TCP/IP, Wi-Fi, USB
---------------	--------------------

Biometric

Push Data	Yes
Sensor type	500 DPI
FAR	0.00001%
FRR	0.001%
OS	Linux
Verification time	<=1 second
RF card options	Proximity / Mifare (Optional)

Audio/Visual

Display	2.4" TFT LCD colour screen
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English

Access control

Relay	Yes
Support	Remote, Push Button, No Touch
Standard Functions	Auto Status, Record Query
	T9 Input, 14 Digit User ID

Power & Environment

Inbuilt Battery Backup	Yes
Operating Temperature	0°C ~ 50°C
Power	12V DC / 2A
Dimension (L*H*W)	160 x 140 x 65 mm



Accepts moist and rough Finger



Accepts Color & Mahendi Finger



Compact & lightweight design



Unaffected by High Temperatures 0° ~ 50°

Software

Desktop, Web, Cloud



Time Attendance



Access Control



Employee Self Service







Mobile App

Disclaimer : Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Certified by    

www.biomaxsecurity.com

Connect with us on

 BiomaxOfficial  BioMax Security
 biomaxsecurity  BioMax Access Control