



NAV KAR
ENTERPRISE

Palm Recognition Multi-Biometric Time Attendance & Access Control System




P160

Specification

- Display : 2.8-inch TFT Color Display
- Palm Capacity : 600
- Fingerprint Capacity : 3,000
- Card Capacity : 10,000
- Logs Capacity : 100,000
- Communication : TCP/IP, USB-Host
- Standard Functions : Automatic Status Switch, Self-Service Query, Work Code, T9 Input, 9 Digit User ID, DST, Scheduled-bell, SMS, RS232 Printer
- AC module 1: Exit Button, Door Lock, Alarm, 12V OUT, AUX IN
- Optional Function : ID Card, MIFARE Card POE, 3G, Battery Module, ADMS
- AC module 2: Exit Button, Door Lock, Alarm, 12V OUT, AUX IN, Door Sensor, RS485, Wiegand IN/OUT.
- Power Supply : 12V 1.5A
- Verification Speed : ≤ 1 sec
- Operating Temperature : 0 - 45 °C
- Operating Humidity : 20% - 80%
- Dimensions : 179.95 x 134.94 x 38.5 mm

Configuration

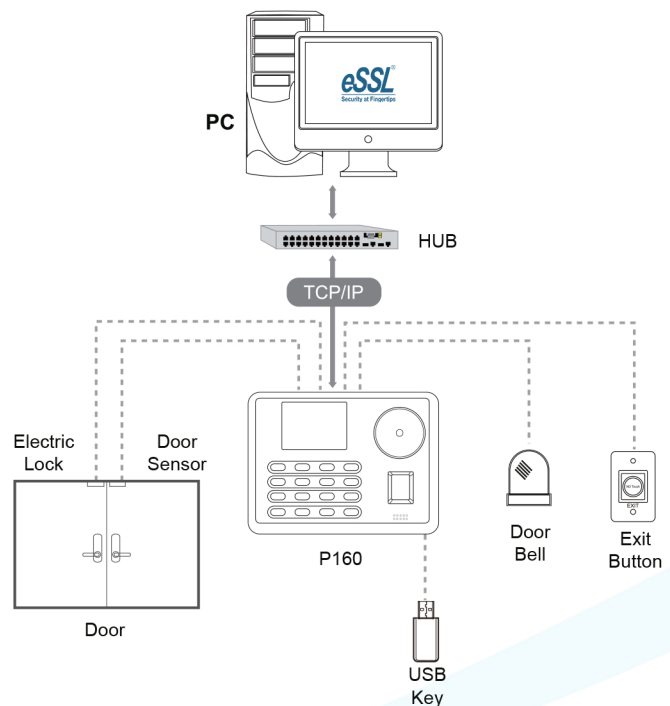

Disclaimer: Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase.

Actual product may differ slightly to that depicted for ongoing product development

www.esslsecurity.com