



**NAVKAAR
ENTERPRISE**

Powered By eSSL



Uranus

Mult-Biometric T&A and Access Control System


Features

- Fingerprint, face, RFID and password 4 type verification mode
- High-speed identification less than 1 second
- TCP/IP Port for Internet connection
- Access Port available to control one lock and exit button
- Optional 5V 1900mAH UPS, standby up to 3 hours


Specification

Product		Uranus
Main	Biometric RF Optional	Fingerprint and Face 125kHz EM / 13.56MHz MIFARE
Capacity	Max User(1:N) Max Fingerprint (1:N) Max Face (1:N) Max Record	500 2000 500 50,000
Interface	TCP/IP USB Relay	10M/100M USB 2.0 (Host) 1 Relay
Hardware	LCD Sound Operating Temp. Operating Humidity Power Dimensions(W x H x D mm)	2.8" Color LCD Stereo speaker 0 °C- 45 °C 20% ~ 80% DC 5V 0.8A 167.9 x 151.5 x 30
Function	Standard	Automatic Status Switch, Self-Service Query, DST, T9 Input 9 Digit User ID, Scheduled Bell, Photo ID Lock, sensor, Exit button
	Optional	ID / MF
Compatibility		eTimeTracklite

Configuration

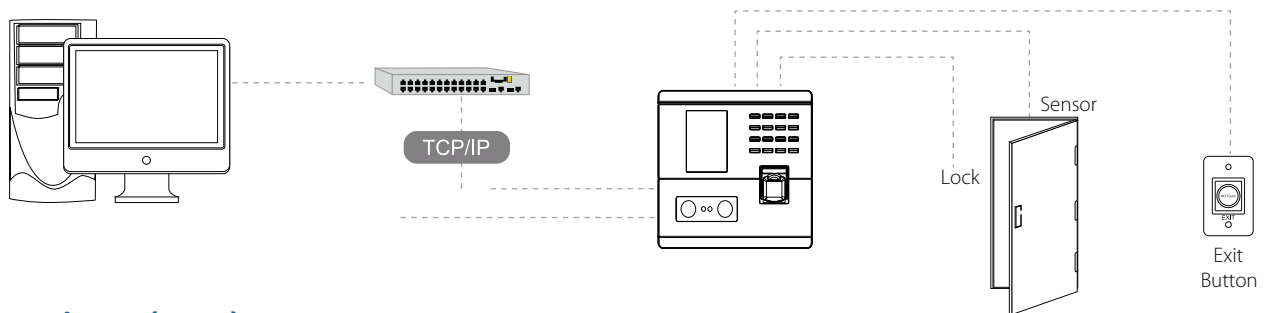

Dimensions (mm)

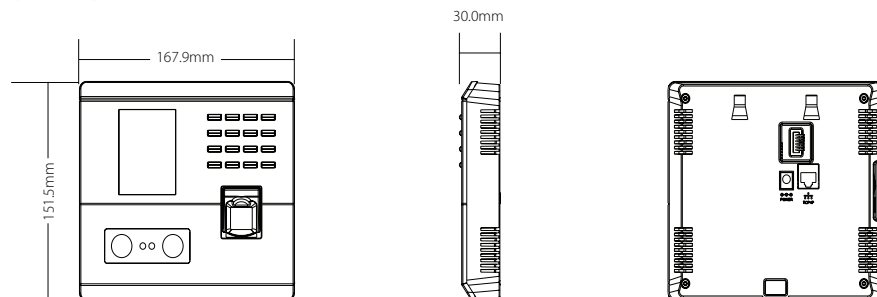

Disclaimer: Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development

Visit Us at: www.esslsecurity.com